

## UK-4 LP DUMPER TRUCK




UK-4 underground LP dumper truck is a trackless underground vehicle used for transporting ore and other materials in the tunnel of underground mines. The complete machine has adopted international famous brand components such as original Cummins low pollution diesel engine , static hydraulic drive system made by Eaton and tail gas treatment device with oxidation catalysis and silencer. And the wet multidisc parking brake adopted is reliable and maintenance-free. The truck can automatically dump and its compact structure and low height make it particularly suitable for mining of thin-layer ore.

Main Technical Specifications		
Item		Value
Rated Loading Capacity(Heaped)(m3)	Heaped	3.0
	Flat	2.0
Complete Machine Weight (Unload) (Kg)		8000
Rated Payload(Kg)		5000
Max. Climbing Capacity (%)		25
Traveling Speed(Forward and Reverse)(Km/h)		0-10
Engine Power	Type	Cummins Engine
	Model/Manufacture	QSB3.9
	Rate power/Rated Revolution(KW/rpm)	81kW/2200rpm
	Exhaust Purifying Method	Oxidation Catalytic+ Silencer
Transmission System	Type	Hydraulic+Mechanical
	Variable Pump Model/Manufacture	DANFOSS 90R075

	Variable Motor Model/Manufacture	DANFOSS H1B110
	Variable Axle Model/Manufacture	DANA 112
Service Braking System		Caliper Disc Brake
Parking Braking System		Wet Multi-Disc Brake
Steering Type		Full-Hydraulic Power Steering
Tire Model		10.00-20 L-3
Operating Weight(Kg)		8000
Turning Radius(mm)	Inside	4000
	Outside	6500
Overall Dimensions (LxWxH)(mm)		(7130~7200)*1800*1700

Dimensions:

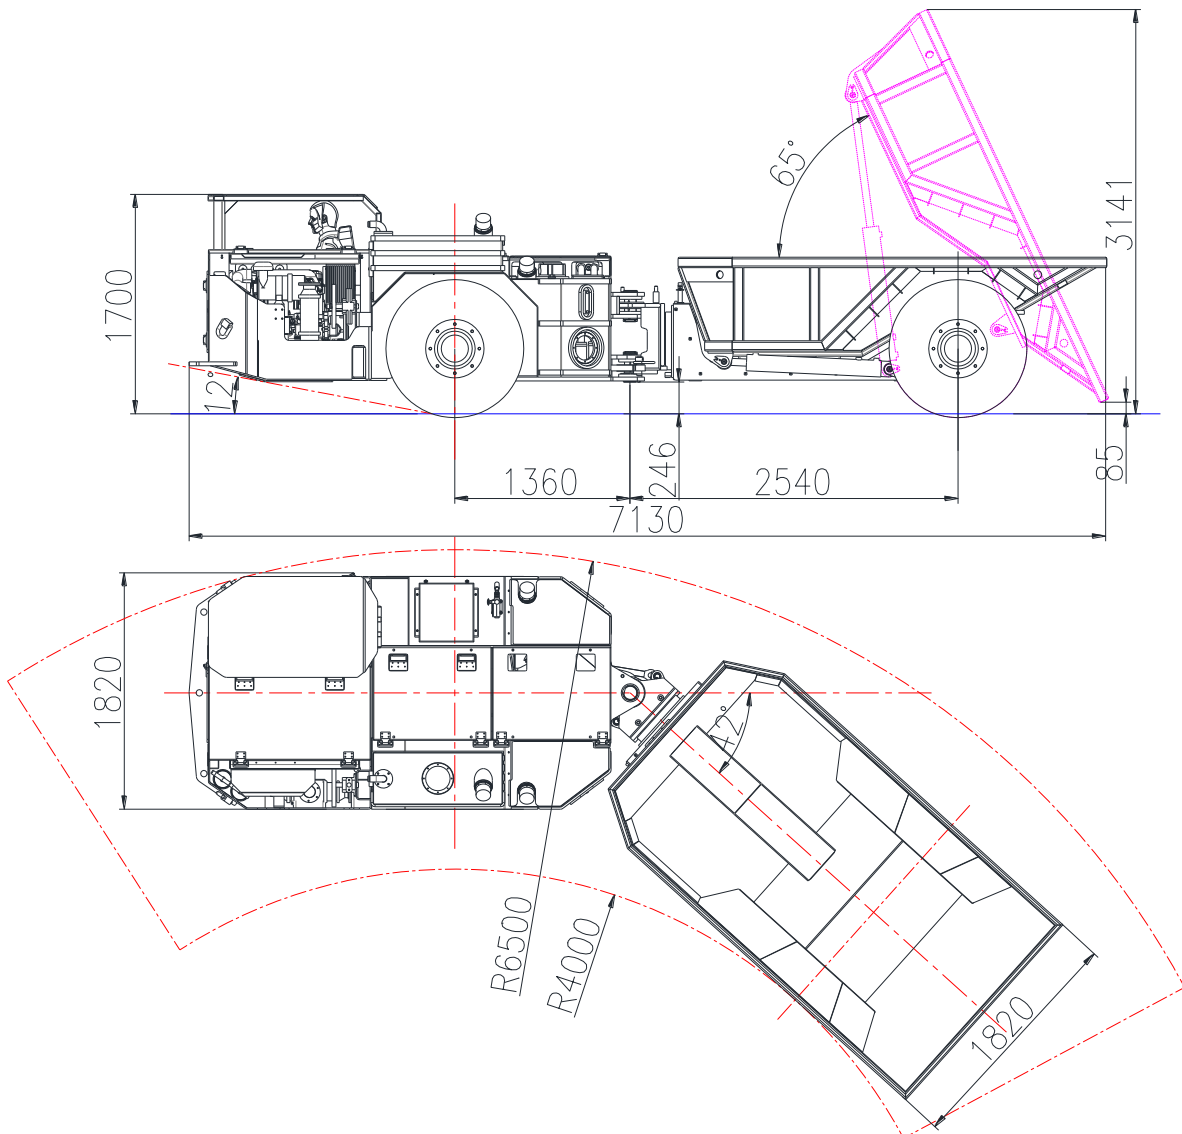

## PARTS AND TOOLS WITH DELIVERY FREE OF CHARGE

UK-4 LP TRUCK DETAILED PACKING INFORMATION

HONGKONG CHAK WAH		Product type and name	Summary		
		UK-4 LP TRUCK			
S/N	Code	Name and specifications	Packing	weight/unit	Qty in total
1	K1425H.00	UK-4 diesel LHD loader	Nude Packing	7T	1
		Wheel loader Packing tent	(length*width*height)	35KG	1
		Diesel TCD914L04 diesel engine filter			1
		Diesel TCD914L04 diesel engine filter			1
2	Service Pack	Service Pack Box 620×480×310	CARTON BOX	12KG	1
2.1	Spare Parts with delivery	Hose connector:19.4s-715(order)(travelling system)			1
		Pneumatic box oil seal:Angle gear oil seal NJ130*2402050			2
		The swinging rack skeleton oil seal:Skeleton oil seal PP140*170*16			1
		Parking system with type O sealing ring: 175*3.55; 125*3.55			1 EACH
		Paper filter TZX2 -100*10		0.5	1
		Line spacing type filter ZL12X-122/10		0.8	1
		Filter FAX-250*30			1
		Combination sealing ring 10 (JB982-77)			2
		Combination sealing ring 12 (JB982-77)			4
		Combination sealing ring 14 (JB982-77)			1
		Combination sealing ring 18 (JB982-77)			9
		Combination sealing ring 22 (JB982-77)			2
		Combination sealing ring 24 (JB982-77)			2
		Combination sealing ring 14 (JB1002-77 used in driving system)			6
Combination sealing ring 33 (JB982-77)			5		
Combination sealing ring 36 (JB982-77)			1		
Combination sealing ring 39 (JB982-77)			2		
Combination sealing ring 42 (JB982-77)			2		
		Type O sealing ring 18*2.4	rubber I-2		2
		Type O sealing ring 20*2.4			2

		Type O sealing ring 22*2.4			1
		Type O sealing ring 26*2.4			1
		Type O sealing ring 28*3.1			1
		Type O sealing ring 30*3.1			1
		Type O sealing ring 36*3.5			2
		Type O sealing ring 40*3.1			1
		Type O sealing ring 45*3.1			1
		Type O sealing ring 45*3.5			1
		Type O sealing ring 50*3.5	rubber I-2		1
		Type O sealing ring 60*3.1			1
		Type O sealing ring 65*3.1			2
		Type O sealing ring 80*3.5			1
		Type O sealing ring 85*3.1			1
		Type O sealing ring 125*5.7			1
		Type O sealing ring 140*5.7			1
		Pressure gauge (6Mp)			1
		Pressure gauge (40Mp)			1
		Pressure measuring joint PT-8			1
2.2	Tools with delivery	Inner Hex wrench S4 S5 S6 S8 S10 S12 S19	GB5356-85		1 pc/each
		Double head solid wrench :8*10Mc	GB4393-84	0.05	1
		Double head solid wrench :12*14	GB4393-84	0.07	1
		Double head solid wrench :14*17	GB4393-84	0.09	1
		Double head solid wrench :17*19	GB4393-84	0.12	1
		Double head solid wrench :22*24	GB4393-84	0.2	1
		Double head solid wrench :24*27	GB4393-84	0.26	1
		Double head solid wrench :27*30	GB4393-84	0.35	1
		Double head solid wrench :30*32	GB4393-84	0.45	1
		Double head solid wrench :32*36	GB4393-84	0.65	1
		Double head solid wrench :41*46	GB4393-84	1.35	1
		Double head solid wrench :50*55	GB4393-84	2.05	1
		Oil gun 100cm3	GB1164-79	1.85	1
		Oil gun 200cm3	GB1164-79	1.21	1
		Socket wrench(Nine pc/set)		1.2	1
		Tire wrench S=38			1
		block ring plier 175 for hole		0.15	1
		block ring plier 175 for shaft		0.15	1
2.3	fittings with delivery	Bolt M12*45 M16*40	GB5782-86	0.048 0.062	8 pc/each
		Washer 12 16	GB93-87	0.046 0.0050	8 pc/each

## PHOTO GALLERY





